


Wood Filler Paste

Polyester Fast Curing Adhesive/Gap Filler

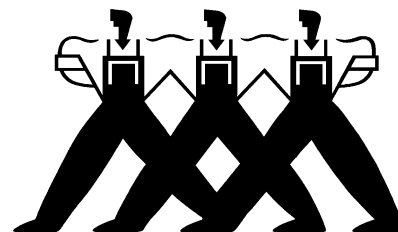

Introduction

Metolux Wood Filler is a two-part unsaturated polyester adhesive wood filler designed to bond materials together and be cured and fully workable in less than 30 minutes.

Metolux Wood Filler can be applied directly from the pack as filler in any thickness or as an adhesive down to 2mm.

Special features

- Easy to mix
- Fast curing
- High strength
- Use with timber, metal, masonry & many plastics
- Contains no water

DESCRIPTION

Metolux Wood Filler is a pine/cream coloured base/white catalyst two pack polyester paste, which can be applied to all types of timber, masonry and many metals. The product can be surface applied or used as a gap filler.

TECHNICAL DATA

Active Substance

Unsaturated Polyester Resin

Other Components

Benzyl peroxide catalyst

Pot Size

500cc (base + catalyst)

Aggressivity to other materials

No known aggressivity

Classification

Irritant

Options

Variable speed of set - catalyst ratio

USES

For timber face to timber face and plastic shutter sealing.

For bonding timber, stone and metal and for filling cracks in timber and masonry.

PREPARATION & METHOD

Remove all loose or flaking material and brush or vacuum to remove dust. Abrade or grind as necessary to provide clean, stable surfaces free of all contaminants.

Mix the PASTE with a small bead of (white or pink) catalyst thoroughly with a stiff, square edged pallet knife. Ensure that the temperature is above 5 degrees Centigrade, or pre-warm the materials, otherwise curing may be delayed.

Either, apply the paste to both surfaces to be bonded, or place with a knife into the void to be filled.

Property Repair Systems - 01626 331351
Unit 3, Olympus Business Park, TQ12 2SN
11/12